

HABERSHAM COUNTY BOARD OF COMMISSIONERS
EXECUTIVE SUMMARY

SUBJECT: ROFA and Terminal Expansion Bid Award

DATE: February 6th, 2023

(X) RECOMMENDATION

() POLICY DISCUSSION

BUDGET INFORMATION:

() STATUS REPORT

ANNUAL- 0

() OTHER

CAPITAL- \$645,456.25

COMMISSION ACTION REQUESTED ON: February 20th, 2023

PURPOSE: To seek permission from the Board of Commissioners to award the local share of the ROFA and Terminal Expansion Bid to the successful bidder.

BACKGROUND / HISTORY: On January 11th, 2023, Lead Edge Design Group, the Habersham County Finance Team, GDOT, and myself were present for the bid opening on this project. Afterwards, Lead Edge Design Group tabulated and certified the bids. Once submitted, GDOT informed us that they will fund both projects, with a 25% local share and 75% state share.

FACTS AND ISSUES: Both projects are necessary for the Habersham County Airport. ROFA is required to help the Board of Commissioners address a liability issue in the case of an aircraft crash, as we are not currently within FAA guidelines for an airport of our classification. The additive bid, referred to as the Terminal Expansion, would greatly increase the size of our ramp space, relieving ramp congestion in busy months and providing a safety element for arriving and departing aircraft with the addition of a second entry/exit point into taxiway A.

OPTIONS:

- 1) Approve recommendation
 - 2) Deny recommendation
 - 3) Commission defined alternative
-
-

RECOMMENDED SAMPLE MOTION: Motion to approve and award, with matching funds, the ROFA and Terminal Expansion Bids, per the Certified Bid Tabulation.

DEPARTMENT:

Prepared by: Will Regan

Airport Manager : _Will Regan_____

**ADMINISTRATIVE
COMMENTS:** _____

_____ **DATE:** _____

County Manager

Habersham County Airport
ROFA Grading Improvements
Certified Bid Tab
January 11, 2023



Schedule of Work				Wilcorp Inc. Toccoa, GA	
Base Bid				Unit Price	Total
Item #	Spec	Item	Quantity	Unit	
1	S-151	Mobilization	1	LS	\$ 115,000.00 \$ 115,000.00
2	S-202	Clearing and Grubbing	3	AC	\$ 32,000.00 \$ 96,000.00
3	S-205	Grass Removal	87.00	CY	\$ 65.00 \$ 5,655.00
4	S-208	Rock Removal	5,000	CY	\$ 0.01 \$ 50.00
5	S-171	Site Fencing, Type Non-Sensitive	8,400	LF	\$ 5.00 \$ 42,000.00
6	S-163	Temporary Grass	14	EA	\$ 500.00 \$ 7,000.00
7	S-163	Construct & Remove Construction Eri	1	EA	\$ 5,000.00 \$ 5,000.00
8	S-163	Construct & Remove Stone Check Dam	1	EA	\$ 5,000.00 \$ 5,000.00
9	S-163	Construct & Remove Stone Check Dam	2	EA	\$ 1,500.00 \$ 3,000.00
10	S-403	Shove Plain No Bar 18 in Thick	50	SY	\$ 150.00 \$ 7,500.00
11	S-167	NPDES Water Quality Inspections	4	MO	\$ 2,500.00 \$ 10,000.00
12	S-716	Erosion Control Mats (Slopes)	14,500	SY	\$ 4.00 \$ 58,000.00
13	S-550	24" R/Cr Class III	256	EA	\$ 1,500.00 \$ 384,000.00
14	S-107	Remove Building Primary Windzone and Foundation	1	LS	\$ 10,000.00 \$ 10,000.00
15	L-107	Remove Building Segmented Circle Marker System	1	LS	\$ 10,000.00 \$ 10,000.00
16	L-107	L-807(L) Slope 1B, Size 2, Wind Cone and Foundation, in Place	1	LS	\$ 30,000.00 \$ 30,000.00
17	L-107	Segmented Circle Marker System, in Place	10	LS	\$ 40,000.00 \$ 400,000.00
18	L-107	Segmented Circle Marker System, in Place	300	LF	\$ 25.00 \$ 7,500.00
19	L-108	No.8 AWG, 34V L-824, Type C Cable, Installed in Trench, Duct Bank or Conduit	100	LF	\$ 25.00 \$ 2,500.00
20	L-108	No.6 AWG, Solid Bare Copper Counterpoise Wire, Installed in Trench, Above Duct Bank or Conduit, Including Connections/Terminations	14	AC	\$ 3,000.00 \$ 42,000.00
21	S-700	Permanent Grading			
TOTAL Base Bid Amount:					\$ 1,143,325.00
Additive Bid				Unit Price	Total
Item #	Spec	Item	Quantity	Unit	
1	S-151	Mobilization	1	LS	\$ 115,000.00 \$ 115,000.00
2	S-202	Clearing and Grubbing	3	AC	\$ 32,000.00 \$ 96,000.00
3	S-205	Grass Removal	87.00	CY	\$ 65.00 \$ 5,655.00
4	S-208	Rock Removal	5,000	CY	\$ 0.01 \$ 50.00
5	S-171	Site Fencing, Type Non-Sensitive	8,400	LF	\$ 5.00 \$ 42,000.00
6	S-163	Temporary Grass	14	EA	\$ 500.00 \$ 7,000.00
7	S-163	Construct & Remove Construction Eri	1	EA	\$ 5,000.00 \$ 5,000.00
8	S-163	Construct & Remove Stone Check Dam	1	EA	\$ 5,000.00 \$ 5,000.00
9	S-163	Construct & Remove Stone Check Dam	2	EA	\$ 1,500.00 \$ 3,000.00
10	S-403	Shove Plain No Bar 18 in Thick	50	SY	\$ 150.00 \$ 7,500.00
11	S-167	NPDES Water Quality Inspections	4	MO	\$ 2,500.00 \$ 10,000.00
12	S-716	Erosion Control Mats (Slopes)	14,500	SY	\$ 4.00 \$ 58,000.00
13	S-550	24" R/Cr Class III	256	EA	\$ 1,500.00 \$ 384,000.00
14	S-107	Remove Building Primary Windzone and Foundation	1	LS	\$ 10,000.00 \$ 10,000.00
15	L-107	Remove Building Segmented Circle Marker System	1	LS	\$ 10,000.00 \$ 10,000.00
16	L-107	L-807(L) Slope 1B, Size 2, Wind Cone and Foundation, in Place	1	LS	\$ 30,000.00 \$ 30,000.00
17	L-107	Segmented Circle Marker System, in Place	10	LS	\$ 40,000.00 \$ 400,000.00
18	L-107	Segmented Circle Marker System, in Place	300	LF	\$ 25.00 \$ 7,500.00
19	L-108	No.8 AWG, 34V L-824, Type C Cable, Installed in Trench, Duct Bank or Conduit	100	LF	\$ 25.00 \$ 2,500.00
20	L-108	No.6 AWG, Solid Bare Copper Counterpoise Wire, Installed in Trench, Above Duct Bank or Conduit, Including Connections/Terminations	14	AC	\$ 3,000.00 \$ 42,000.00
21	S-700	Permanent Grading			
TOTAL Additive Bid Amount:					\$ 1,438,500.00
TOTAL COMBINED Bid Amount Base Bid + Additive Bid:					\$ 2,581,825.00

Certification

These bids have been reviewed and tabulated, and are correct and truthful to the best of my knowledge.

by: [Signature]
Lead Edge Design Group, Inc.
Date: 01.13.23

HABERSHAM COUNTY AIRPORT
CORNELIA, GEORGIA

EXHIBIT A

SUMMARY OF CONSTRUCTION ITEMS

DOT PROJECT NUMBER: AP023-50 (137) Habersham
PID-T0077

ROFA GRADING IMPROVEMENTS; APRON EXPANSION

ITEM	SPEC	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	TOTAL	%	FEDERAL FUNDS	%	STATE FUNDS	%	LOCAL FUNDS
Part I FY23 State Funds												
ROFA GRADING IMPROVEMENTS												
1	S-151	Mobilization	LS	1	\$115,000.00	\$115,000.00	0%	\$0.00	75%	\$86,250.00	25%	\$28,750.00
2	S-202	Clearing and Grubbing	AC	3	\$12,000.00	\$36,000.00	0%	\$0.00	75%	\$27,000.00	25%	\$9,000.00
3	S-205	Unclassified Excavation	CY	87250	\$7.50	\$654,375.00	0%	\$0.00	75%	\$490,781.25	25%	\$163,593.75
4	P-152	Rock Excavation	CY	5000	\$50.01	\$50,005.00	0%	\$0.00	75%	\$37,503.75	25%	\$12,501.25
5	S-171	Silt Fence, Type Non-Sensitive	LF	8400	\$5.00	\$42,000.00	0%	\$0.00	75%	\$31,500.00	25%	\$10,500.00
6	S-163	Temporary Grassing	AC	14	\$500.00	\$7,000.00	0%	\$0.00	75%	\$5,250.00	25%	\$1,750.00
7	S-163	Construct & Remove Construction Exit	EA	1	\$5,000.00	\$5,000.00	0%	\$0.00	75%	\$3,750.00	25%	\$1,250.00
8	S-163	Construct & Remove Stone Check Dam	EA	10	\$1,500.00	\$15,000.00	0%	\$0.00	75%	\$11,250.00	25%	\$3,750.00
9	S-163	Construct & Remove Stone Filter Ring	EA	2	\$1,500.00	\$3,000.00	0%	\$0.00	75%	\$2,250.00	25%	\$750.00
10	S-603	Construct & Remove Stone Rip Rap 18 in thick	SY	50	\$150.00	\$7,500.00	0%	\$0.00	75%	\$5,625.00	25%	\$1,875.00
11	S-167	NPDES Water Quality Inspections	MO	4	\$2,500.00	\$10,000.00	0%	\$0.00	75%	\$7,500.00	25%	\$2,500.00
12	S-716	Erosion Control Mats (Slopes)	SY	14500	\$4.00	\$58,000.00	0%	\$0.00	75%	\$43,500.00	25%	\$14,500.00
13	S-550	24" RCP Class III	LF	256	\$150.00	\$38,400.00	0%	\$0.00	75%	\$28,800.00	25%	\$9,600.00
14	S-441	24" Concrete Headwall	EA	1	\$5,000.00	\$5,000.00	0%	\$0.00	75%	\$3,750.00	25%	\$1,250.00
15	L-107	Remove Existing Primary Windcone and Foundation	LS	1	\$10,000.00	\$10,000.00	0%	\$0.00	75%	\$7,500.00	25%	\$2,500.00
16	L-107	Remove Existing Segmented Circle Marker System	LS	1	\$10,000.00	\$10,000.00	0%	\$0.00	75%	\$7,500.00	25%	\$2,500.00
17	L-107	(L-807/L) Style 1B, Size 2, Wind Cone and Foundation, in place	LS	1	\$30,000.00	\$30,000.00	0%	\$0.00	75%	\$22,500.00	25%	\$7,500.00
18	L-107	Segmented Circle Marker System, in place	LS	1	\$40,000.00	\$40,000.00	0%	\$0.00	75%	\$30,000.00	25%	\$10,000.00
19	L-108	Trenching for Direct-Buried Cable, 18-inch Minimum Depth	LF	100	\$50.00	\$5,000.00	0%	\$0.00	75%	\$3,750.00	25%	\$1,250.00
20	L-108	No.8 AWG, 5 kV, L-824, Type C Cable, Installed in Trench, Duct Bank or Conduit	LF	300	\$25.00	\$7,500.00	0%	\$0.00	75%	\$5,625.00	25%	\$1,875.00
Part II FY23 State Funds												
TERMINAL AREA IMPROVEMENTS												
21	L-108	No.6 AWG, Solid, Bare Copper Counterpoise Wire, Installed in Trench, Above Duct Bank or Conduit, Including Connections/Terminations	LF	100	\$25.00	\$2,500.00	0%	\$0.00	75%	\$1,875.00	25%	\$625.00
22	S-700	Permanent Grassing	AC	14	\$3,000.00	\$42,000.00	0%	\$0.00	75%	\$31,500.00	25%	\$10,500.00
Total Part I State Funds						\$1,143,325.00		\$0.00		\$857,493.75		\$285,831.25
Part II FY23 State Funds												
TERMINAL AREA IMPROVEMENTS												
23	S-151	Mobilization	LS	1	\$85,000.00	\$85,000.00	0%	\$0.00	75%	\$63,750.00	25%	\$21,250.00
24	P-101	Cold Milling	SY	1450	\$25.00	\$36,250.00	0%	\$0.00	75%	\$27,187.50	25%	\$9,062.50
25	S-202	Clearing and Grubbing	AC	2	\$12,000.00	\$24,000.00	0%	\$0.00	75%	\$18,000.00	25%	\$6,000.00
26	S-208	In-Place Embankment	CY	62900	\$5.00	\$314,500.00	0%	\$0.00	75%	\$235,875.00	25%	\$78,625.00
27	S-171	Silt Fence, Type Non-Sensitive	LF	2100	\$5.00	\$10,500.00	0%	\$0.00	75%	\$7,875.00	25%	\$2,625.00
28	S-163	Temporary Grassing	AC	3	\$500.00	\$1,500.00	0%	\$0.00	75%	\$1,125.00	25%	\$375.00
29	S-163	Construct & Remove Construction Exit	EA	1	\$5,000.00	\$5,000.00	0%	\$0.00	75%	\$3,750.00	25%	\$1,250.00

CFDA: 20.106; UEI:
Indirect Cost Rate-N/A-Research and Development-No

HABERSHAM COUNTY AIRPORT
CORNELIA, GEORGIA

EXHIBIT A

SUMMARY OF CONSTRUCTION ITEMS

GDOT PROJECT NUMBER: AP023-0000000000 (137) Habersham
PID-T0077

ROFA GRADING IMPROVEMENTS, APRON EXPANSION


30	S-163	Construct & Remove Inlet Sediment Traps	EA	4	\$1,500.00	\$6,000.00	0%	\$0.00	75%	\$4,500.00	25%	\$1,500.00
31	S-163	Construct & Remove Stone Filler Ring	EA	1	\$1,500.00	\$1,500.00	0%	\$0.00	75%	\$1,125.00	25%	\$375.00
32	S-163	Construct & Remove Retrofit	EA	1	\$1,500.00	\$1,500.00	0%	\$0.00	75%	\$1,125.00	25%	\$375.00
33	S-163	Construct & Remove Temporary Pipe Slope Drains	LF	230	\$30.00	\$6,900.00	0%	\$0.00	75%	\$5,175.00	25%	\$1,725.00
34	S-163	Construct & Remove Temporary Sediment Trap	EA	1	\$10,000.00	\$10,000.00	0%	\$0.00	75%	\$7,500.00	25%	\$2,500.00
35	S-163	Construct & Remove Floating Surface Skimmer	EA	1	\$1,500.00	\$1,500.00	0%	\$0.00	75%	\$1,125.00	25%	\$375.00
36	S-167	NPDES Water Quality Inspections	MO	3	\$2,000.00	\$6,000.00	0%	\$0.00	75%	\$4,500.00	25%	\$1,500.00
37	S-716	Erosion Control Mats (Slopes)	SY	4300	\$4.00	\$17,200.00	0%	\$0.00	75%	\$12,900.00	25%	\$4,300.00
38	S-310	Graded Aggregate Base Course, 12 in Thick	SY	10200	\$22.00	\$224,400.00	0%	\$0.00	75%	\$168,300.00	25%	\$56,100.00
39	P-602	Emulsified Asphalt Prime Coat	GAL	2800	\$5.00	\$14,000.00	0%	\$0.00	75%	\$10,500.00	25%	\$3,500.00
40	S-400	Bituminous Surface Course	TON	2600	\$175.00	\$455,000.00	0%	\$0.00	75%	\$341,250.00	25%	\$113,750.00
41	-	Tile Down Anchors, in place	EA	18	\$1,500.00	\$27,000.00	0%	\$0.00	75%	\$20,250.00	25%	\$6,750.00
42	L-108	Trenching for Direct-Buried Cable, 18-inch Minimum Depth	LF	800	\$25.00	\$20,000.00	0%	\$0.00	75%	\$15,000.00	25%	\$5,000.00
43	L-108	No.8 AWG, 5 KV, L-824, Type C Cable, Installed in Trench, Duct Bank or Conduit	LF	1000	\$15.00	\$15,000.00	0%	\$0.00	75%	\$11,250.00	25%	\$3,750.00
44	L-108	No.6 AWG, Solid, Bare Copper Counterpoise Wire, Installed in Trench, Above Duct Bank or Conduit, Including Connections/Terminations	LF	650	\$15.00	\$9,750.00	0%	\$0.00	75%	\$7,312.50	25%	\$2,437.50
45	L-110	Concrete Encased Electrical Duct Bank, 4-Way 4-Inch C, 24 in Minimum Cover	LF	75	\$250.00	\$18,750.00	0%	\$0.00	75%	\$14,062.50	25%	\$4,687.50
46	L-125	Remove Existing Taxiway Edge Light	EA	6	\$500.00	\$3,000.00	0%	\$0.00	75%	\$2,250.00	25%	\$750.00
47	L-125	Medium Intensity, Taxiway Edge Light, L-861T, Class 1, Model 1, Option 4	EA	6	\$2,500.00	\$15,000.00	0%	\$0.00	75%	\$11,250.00	25%	\$3,750.00
48	L-125	Medium Intensity, Taxiway Edge Light, L-861T, Class 2, Model 1, Option 4	EA	3	\$3,500.00	\$10,500.00	0%	\$0.00	75%	\$7,875.00	25%	\$2,625.00
49	L-125	3 Module Guidance Sign, Size 2, Class 1, Model 1	EA	2	\$10,000.00	\$20,000.00	0%	\$0.00	75%	\$15,000.00	25%	\$5,000.00
50	P-620	Temporary Airfield Marking, Yellow, Non-Reflective, including Microbicide	SF	250	\$50.00	\$12,500.00	0%	\$0.00	75%	\$9,375.00	25%	\$3,125.00
51	P-620	Airfield Marking, Yellow, with Reflective Media, including Microbicide	SF	400	\$50.00	\$20,000.00	0%	\$0.00	75%	\$15,000.00	25%	\$5,000.00
52	P-620	Airfield Marking, Yellow, Non-Reflective, including Microbicide	SF	20	\$50.00	\$1,000.00	0%	\$0.00	75%	\$750.00	25%	\$250.00
53	S-700	Permanent Grassing	AC	3	\$3,000.00	\$9,000.00	0%	\$0.00	75%	\$6,750.00	25%	\$2,250.00
54	S-400	QA Testing Program	LS	1		\$0.00	0%	\$0.00	75%	\$0.00	25%	\$0.00
Total Project Cost						\$1,402,250.00		\$0.00		\$1,051,687.50		\$350,562.50
						\$2,545,575.00		\$0.00		\$1,909,181.25		\$636,393.75

* GDOT review and concurrence with proposal required for participation

FAA Federal Grant and FAIN #	FY23 State	Federal Award Date	Amount	Fund Source
		N/A	\$1,909,181.25	01225

CFDA: 20.106; UEI:
Indirect Cost Rate-N/A-Research and Development-No

EXHIBIT A

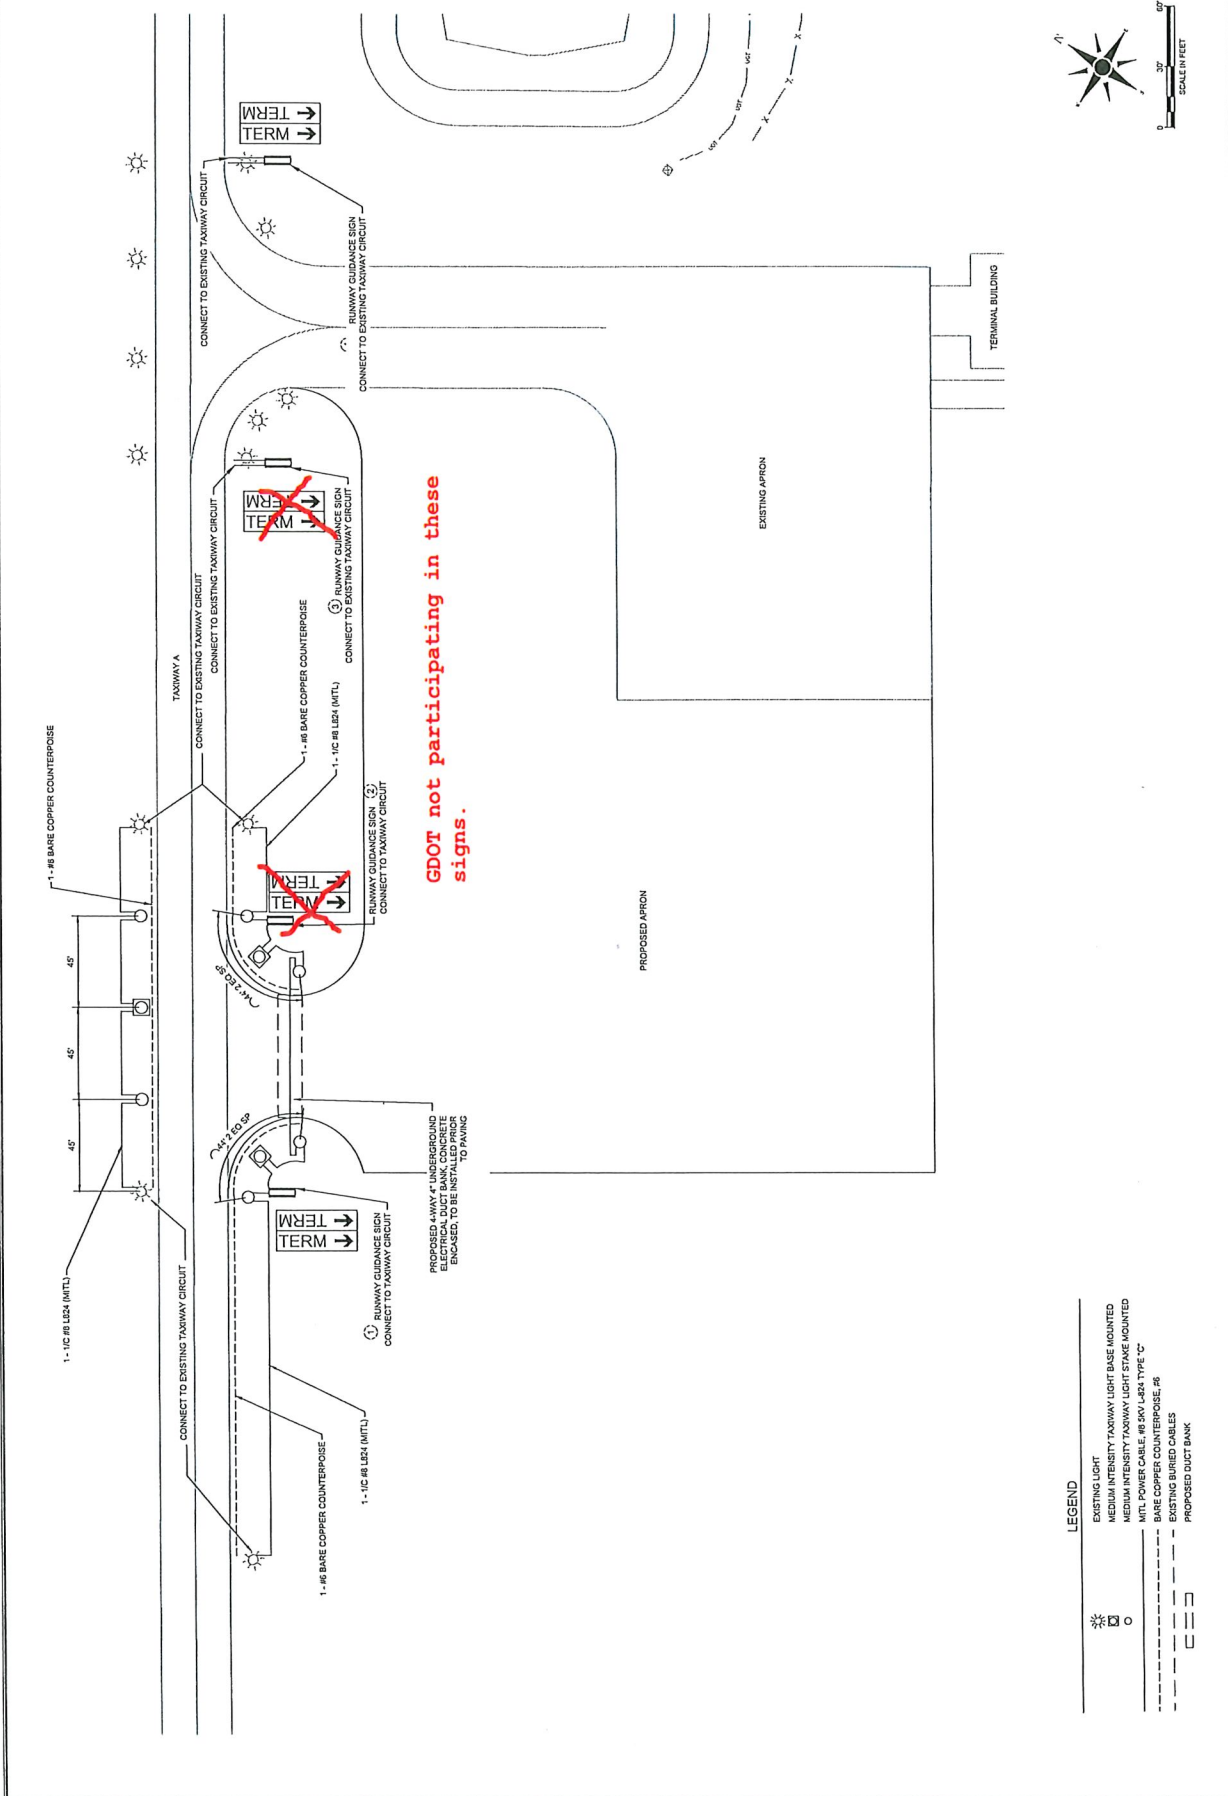



Russell R. McMurry, P.E., Commissioner
One Georgia Center
600 West Peachtree NW
Atlanta, GA 30308
(404) 631-1990 Main Office

MEMORANDUM

Date: September 7, 2022 **February 2, 2023**

To: Will Regan, Airport Manager, Habersham County Airport

From: Damon G. Carr, GDOT Aviation Project Manager

Cc: Alicia Vaughn, County Manager, Habersham County
Amanda Rostin, EIT, Project Manager, Lead Edge Design Group
Phil Eberly, President, Lead Edge Design Group

Subject: ROFA Improvements – Plan and Specification Review
Habersham County Airport
Cornelia, Georgia

Georgia DOT – Aviation Programs has reviewed the Subject plans and specifications revised and submitted to our office. Please see comments below for consideration:

09.23.2022 Lead Edge Design Group Response to Comments in Red Bold

02.02.2023 GDOT Post-Bid Final Comments in Blue Bold

GDOT will participate in both Base Bid and Additive Bid as stipulated below:

Project Outline: ROFA Improvements (Apron Expansion Additive Bid)

Bid Opening Date: TBD **Confirmation of concurrence with GDOT prior to project bid posting. 1-11-23**

Contract Time: 125 calendar days (additional 90 days for Additive Bid)

Liquidated Damages: \$1,000 per calendar day

Contractor to Hold Bids: 120 calendar days

Percentage of Work Performed by Prime Contractor: Minimum of 30%

DBE Goal: N/A (state/local project)

Please see comments below for consideration:

Construction Plans:

Summary of Quantities – Base Bid:

- Item #10 "Erosion Control Matting" is not a pay item in GDOT spec 163. It is a pay item in several specs in the 700 series. Please consider an appropriate specification from this series. **Item S-163 Erosion Control Matting has been removed. Item S-716 Erosion Control Mats (Slopes) has been added along with corresponding GDOT Specification S-716. See updated plans and specifications.**
- Item #12 "NPDES Water Quality Inspections" quantity does not match bid package (7 months vs. 3 months). **NPDES Water Quality Inspection quantity has been updated. See updated plans and specifications.**

- Item #14 "24" Concrete Headwall" is not a pay item in GDOT spec 550. Please consider GDOT spec 441 or FAA spec D-752. **Item S-550 24" Concrete Headwall has been removed. Item S-441 Concrete Headwall has been added along with corresponding GDOT Specification S-441. See updated plans and specifications.**

Summary of Quantities – Additive Bid:

- Item #14 "Erosion Control Matting" is not a pay item in GDOT spec 163. It is a pay item in several specs in the 700 series. Please consider an appropriate specification from this series. **Item S-163 Erosion Control Matting has been removed. Item S-716 Erosion Control Mats (Slopes) has been added along with corresponding GDOT Specification S-716. See updated plans and specifications.**
- Item #23 "Remove Existing Taxiway Edge Light" quantity does not match Plan Sheet 05.05 (5 lights vs. 6 lights). **Remove Existing Taxiway Edge Light Quantity has been revised. See updated plans and specifications.**
- **Item #27 "3 Module Guidance Sign": GDOT will participate in a quantity of two (2) signs. See included plan markup for signs to be removed. The Sponsor may elect to include the additional signs at its own expense.**
- **Item #31 "Airfield Marking, Black": GDOT will not participate in this pay item. The Sponsor may elect to include black airfield marking in the project at its own expense.**

Construction Safety and Phasing Plan:

- Please note that FAA 7460 "Notice of Proposed Construction or Alteration" must be submitted to GDOT for review and approved by FAA via OE/AAA submittal site prior to construction. Please allow up to 120 days for review and approval. **FAA 7460 "Notice of Proposed Construction or Alteration" will be submitted prior to construction.**

Grading Plan:

- Please add a note for Unclassified Excavation Pay item that contractor is responsible for providing before and after cross sections of the project site in a format suitable to GDOT for verifying in-place quantities. **Note for Unclassified Excavation Pay item has been added. See updated plans.**

Paving Plan and Details:

- Please add a note that "Special Provision Section 828 requiring reduced Air Voids of Asphalt Mix is applicable to this project".
 - (NOTE: SP Section 828 is attached to the email with this review document for your inclusion in the specifications.) **Note has been added to plans that "Special Provision Section 828 requiring reduced Air Voids of Asphalt Mix is applicable to this project" and specification S-828 had been included. See updated plans and specifications.**

Marking Plan and Details:

- Please add a note for taxiway centerline marking detail for Type III yellow paint and beads. **Note for taxiway marking has been added. See updated plans.**
- **GDOT will not participate in the 650 SF of black airfield marking.**

Lighting Plan and Details:

- Please add a legend. **Legend has been added. See updated plans.**
- Please include a detail for signs depicting side and end view. **Side view has been added to sign schedule. See updated plans.**
- **GDOT will participate in two (2) of the signs. See included plan markup for signs to be removed.**

Proposal Package and Specifications:

Proposal Bid Form

- Please modify to match "Summary of Quantities" notes above. **Bid form has been updated to reflect all comments above. See updated specifications.**

Supplemental General Provisions

- SGP-1 Scope of Work describes the Work as "hangar building construction". **SGP-1 Scope of Work has been revised. See updated specifications.**

General Comments:

- Please submit a current Engineer's Estimate for GDOT review and concurrence prior to project bid posting. **A current Engineer's Estimate for GDOT review and concurrence will be submitted prior to project bid posting.**
- Award of the Additive Bid is contingent upon availability of state funding.

While the above comments indicate the Department has reviewed the submitted plans and specifications, the Airport Sponsor has the final responsibility to ensure the plans and specifications are in compliance with FAA specifications and/or the GDOT Standard Specifications Construction of Transportation Systems, 2021 Edition or by Special Provision.

Please consider the above and send a final revised electronic plan set and specification package with response to comments included in this document via e-mail by September 26, 2022. The response may be included in this document as sub-bullets to the comments herein. Please call or email Damon Carr, Aviation Project Manager, at (470) 715-5494 or dacarr@dot.ga.gov with any questions or clarifications.

